


# OSI 2000

with an output of 1,000 slpm or 1,937 kg per day the **OSI 2000** would be the ideal oxygen concentrator based on your unique needs

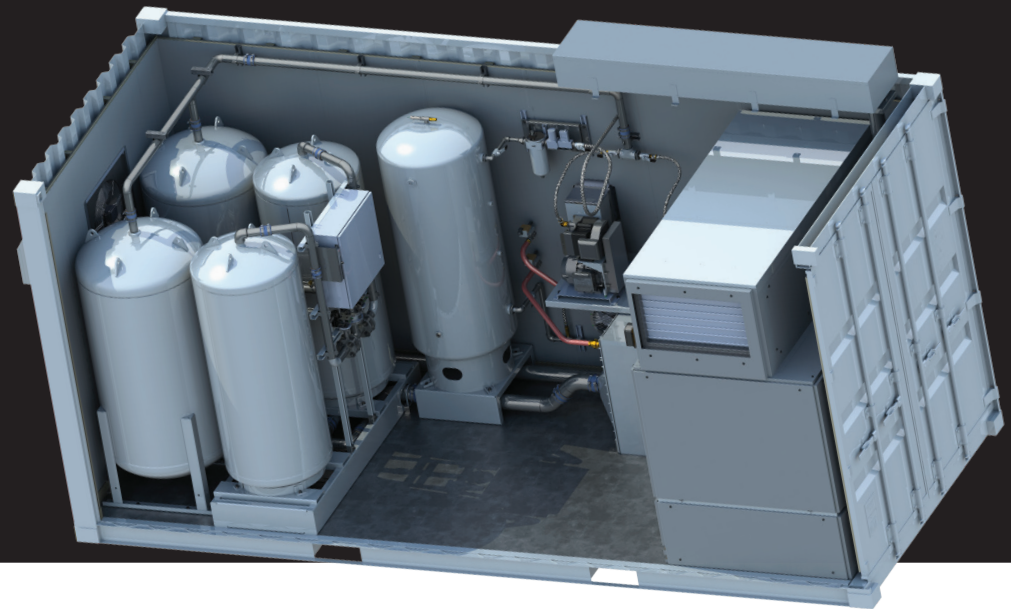

**Our oxygen concentrators feature Vacuum Swing Adsorption (VSA) for maximum energy efficiency and productivity based on cost per kilogram of oxygen.**

## Benefits

- Save money on power consumption
- Plug and play installation
- Self-contained and moveable
- Extremely low maintenance
- Remote diagnostics and communications
- Automatic turn-down to suit demand

## Specifications

Power Options	460 or 575 VAC/60 Hz 3Ph 380 VAC/50 Hz 3Ph
Discharge Pressure (w/Booster Compressor)	0.30-0.45 barg 1.40-6.5 barg
Operating Temperature	4-32 °C
Average Current Draw	45 A/460 VAC/60 Hz @ 4.0 barg
Average Power Consumption	38 kW @4.0 barg
Cost of Oxygen Generation	0.40 kW/kg O <sub>2</sub> @ 4.0 barg
Dry Weight, Container	~4,100 kg
Oxygen Outlet	3/4" NPT